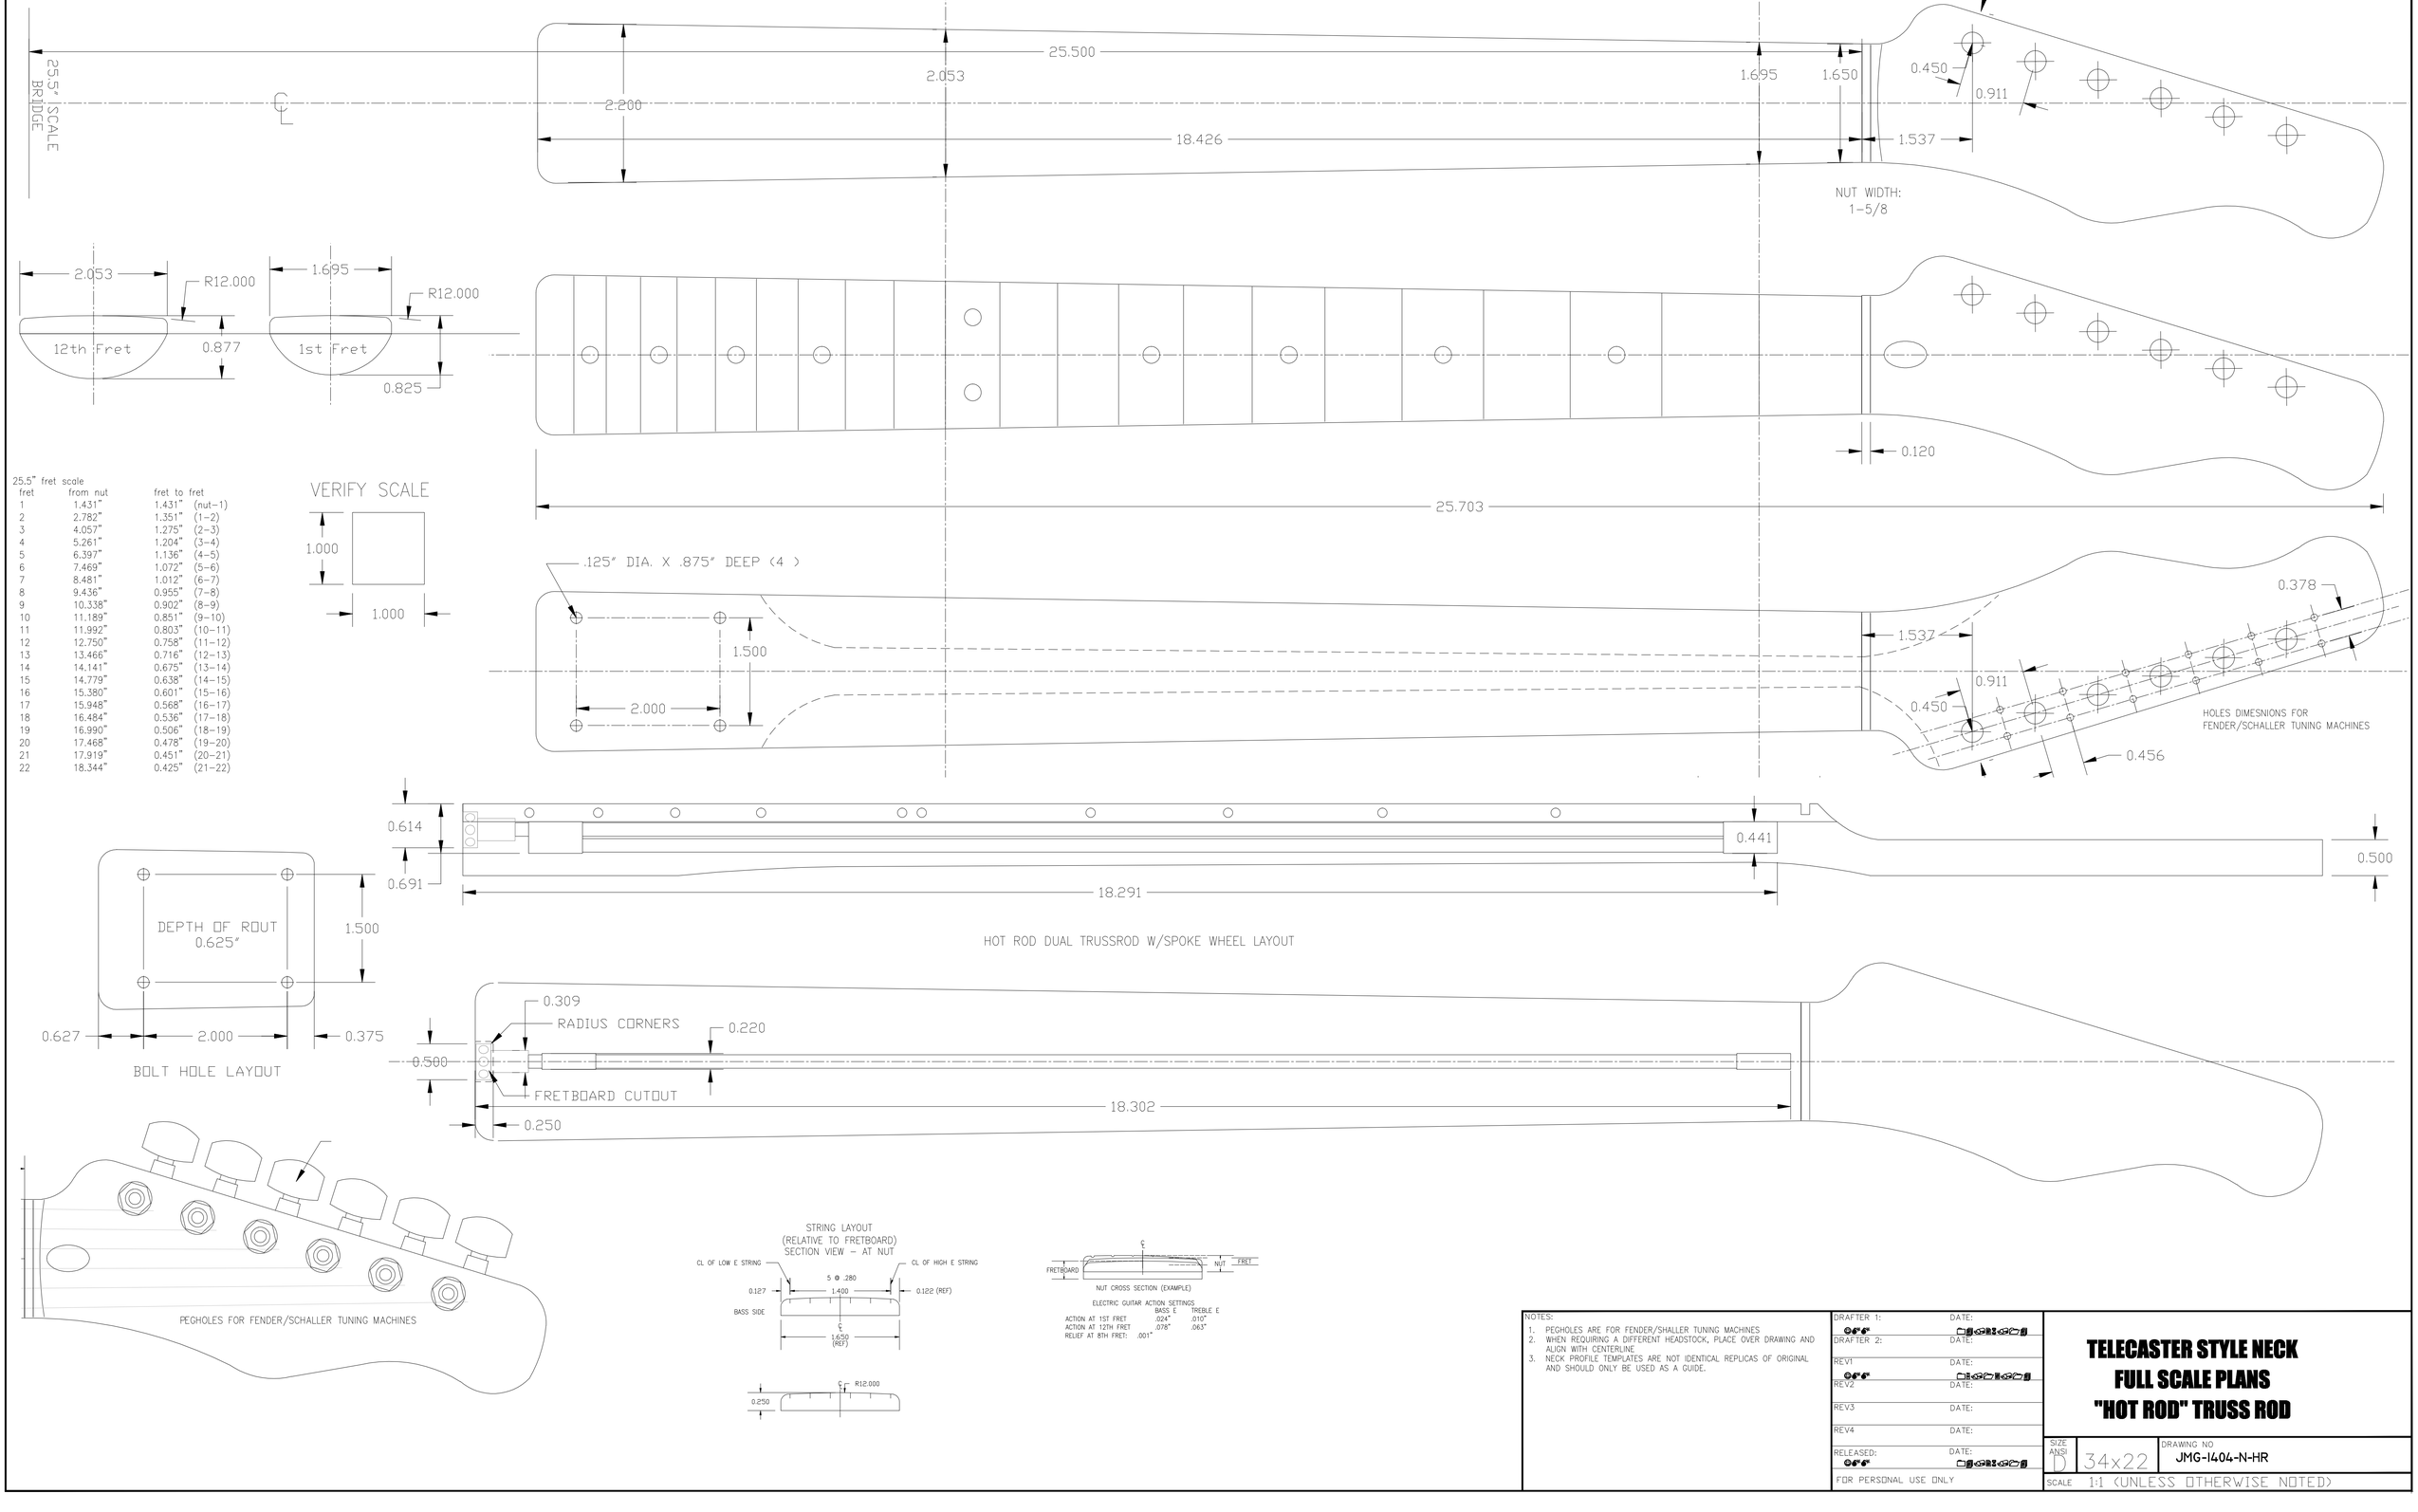

HOT ROD DUAL TRUSSROD W/SPOKE WHEEL LAYOUT

25.5" fret scale

fret	from nut	fret to fret	
1	1.431"	1.431"	(nut–1)
2	2.782"	1.351"	(1–2)
3	4.057"	1.275"	(2–3)
4	5.261"	1.204"	(3–4)
5	6.397"	1.136"	(4–5)
6	7.469"	1.072"	(5–6)
7	8.481"	1.012"	(6–7)
8	9.436"	0.955"	(7–8)
9	10.338"	0.902"	(8–9)
10	11.189"	0.851"	(9–10)
11	11.992"	0.803"	(10–11)
12	12.750"	0.758"	(11–12)
13	13.466"	0.716"	(12–13)
14	14.141"	0.675"	(13–14)
15	14.779"	0.638"	(14–15)
16	15.380"	0.601"	(15–16)
17	15.948"	0.568"	(16–17)
18	16.484"	0.536"	(17–18)
19	16.990"	0.506"	(18–19)
20	17.468"	0.478"	(19–20)
21	17.919"	0.451"	(20–21)
22	18.344"	0.425"	(21–22)

VERIFY SCALE

NOTES:
1. PEGHOLES ARE FOR FENDER/SHALLER TUNING MACHINES
2. WHEN REQUIRING A DIFFERENT HEADSTOCK, PLACE OVER DRAWING AND ALIGN WITH CENTERLINE
3. NECK PROFILE TEMPLATES ARE NOT IDENTICAL REPLICAS OF ORIGINAL AND SHOULD ONLY BE USED AS A GUIDE.

DRAFTER 1: DATE:
DRAFTER 2: DATE:
REV1 DATE:
REV2 DATE:
REV3 DATE:
REV4 DATE:
RELEASED: DATE:

FOR PERSONAL USE ONLY

TELECASTER STYLE NECK
FULL SCALE PLANS
"HOT ROD" TRUSS ROD

SIZE ANSI D | 34x22 | DRAWING NO JMG-1404-N-HR

SCALE 1:1 (UNLESS OTHERWISE NOTED)